

Tip 4/4 Thermoplastic Hose



Applications

Waterblast : Heat exchanger tube cleaning

Hydraulics : Pressure test equipment (valves, tooling and control panels), hydraulic tools (instrumentation packages for gauges, control of service equipment, hydraulic jacks, hydraulic tools)

Inner Core : Polyoxymethylene (POM)
 Pressure Support : 4 layers of high-tensile steel wire
 Outer Cover : Polyamide (PA)
 Colour : Grey, other colours optional.
 Temperature : [-30 °C to +60 °C]


Lenght (m)	Thread	Part No
10	G1/4" (Female)	00.70.0452
	1/4"x28UNF (LH)	00.70.0453
	G1/8" (Male)	00.70.0550
	1/4"x28UNF (LH)	00.70.0560
15	G1/8" (Male)	00.70.0515
20	1/4"x28UNF (LH)	00.70.0460
	G1/8" (Male)	00.70.0500

Inner Diameter Ø mm	Outer Diameter Ø mm	Working Pressure * Bar	Burst Pressure Bar	Bend Radius mm	Weight kg/m	Inner Diameter of Insert	Outer Cover Material	Outer Cover Diameter Ø mm
4.0	10.3	2200	5500	130	0.234	1.8	Carbon Steel	14.7

* Safety factor between burst pressure and working pressure as well as test pressure depends on operating conditions. For gaseous media a safety factor of 1:6 is to be applied and the outer cover is to be pricked. The indicated working pressure refers to the hos only. Depending on the used fitting the permitted working pressure of a hose assembly can be less.


Fitting

Fitting Type : Male
 Thread : 1/4"x28 UNF LH
 Material : Carbon Steel

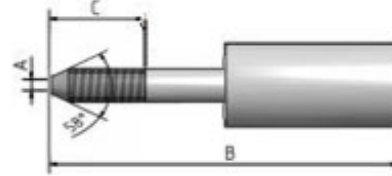


Fitting

Fitting Type : Male
 Thread : 3/8"x28 UNF
 Material : Carbon Steel

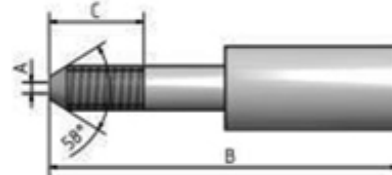


Fitting

Fitting Type : Male
 Thread : G1/8"
 Material : Carbon Steel

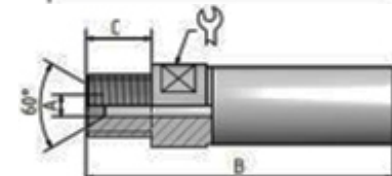

Fitting

Fitting Type : Male
 Thread : G1/4"
 Material : Carbon Steel

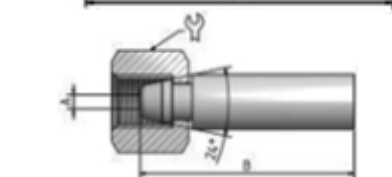

KAMAT SU JETİ TEKNOLOJİSİ MAKİNA İNŞ. SAN. ve TİC. LTD. ŞTİ.

